


PIN	SYMBLE
1	VBL-
2	VBL+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

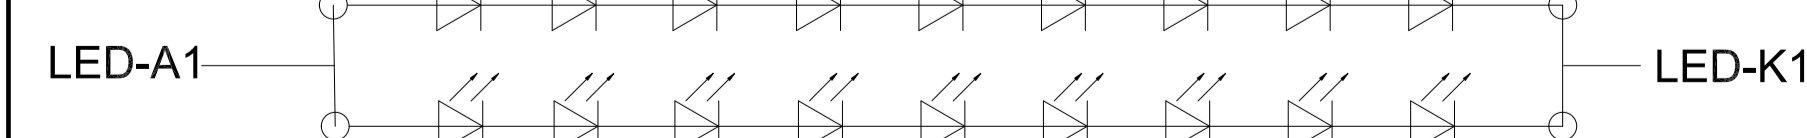

CIRCUIT DIAGRAM

- LCM NOTES:
1. DISPLAY TYPE: 4.3 INCH TFT /Normally black
  2. BACKLIGHT: 18 CHIP WHITE LED, 9S2P  
IF =27±1.0V;IV = 20\*2mA
  3. OPERATING TEMP: -20°C~+60°C
  4. STORAGE TEMP: -30°C~+70°C
  5. LCD IC: HX8264-D06+HX8664-B
  6. Luminance:1000cd/m2(TYP)
  7. "( )"reference dimension. "\*"critical dimension
  8. RoHS Compliant

REV.	DATE	MODIFICATION
1.0	2018.09.12	First issue

INTERFACE	RGB Interface
	FPC Connector (FH12-40S-0.5SH)
VIEWING DIRECTION	IPS
Gray DIRECTION	ALL



File NO: DWG-LM043HWV08ES	PART NO. LM043HWV08ES
DWN XW 2018.09.12	REV. 1.0 SHEET OF 1/1
CHKD XW 2018.09.12	TOLERANCE UNLESS SPECIFIED ±0.2
PROJECTION 3rd ANGLE	UNIT mm SCALE 1:1